


CONTACT DETAIL

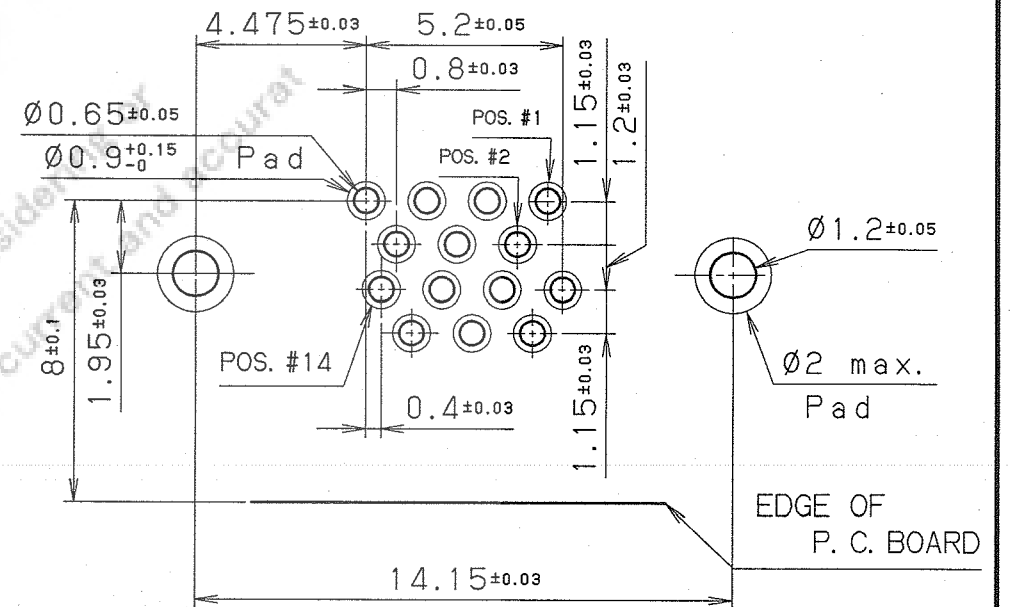

RECOMMENDED P. C. B. LAYOUT  
(MOUNT SIDE VIEW)  
(t=1.6 SCALE=5/1)

NOTE

1. CONTACT PLATING  
MATING AREA: 0.76 MICRO METERS MINIMUM GOLD PLATING  
TERMINATION AREA: 0.05 MICRO METERS MINIMUM GOLD PLATING  
UNDERPLATING: NICKEL PLATING
2. MATING CONNECTOR  
HDR-E14MAG1+
3. SPECIFICATION  
RATED CURRENT 0.5A  
RATED VOLTAGE 125V AC (r. m. s.)

6	LOCK SCREW	STEEL	2	NICKEL PLATING	—
5	BOARD LOCK PIN	PHOSPHOR BRONZE	2	NICKEL PLATING	—
4	BRACKET	PPS (GF)	1	—	UL94V-0 BLACK
3	FEMALE CONTACT	PHOSPHOR BRONZE	14	NOTE. #1	—
2	INSULATOR	PA9T (GF)	1	—	UL94V-0 BLACK
1	SHELL	STEEL	1	NICKEL PLATING	—

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	Jan. 12. 2006	Y. K	2 / 1	Revise						
DATE						SCALE	UNIT	3RD. A. P		
APP. DATE & REV.						HONDA TSUSHIN KOGYO CO., LTD.				
DR.	DE.	CHK.	CHK.	APP.	NAME	0.8mm SPACING RIGHTANGLE FEMALE CONNECTOR				
PART NO.						HDR-EC14LFDN-SLE+				REV. 1A