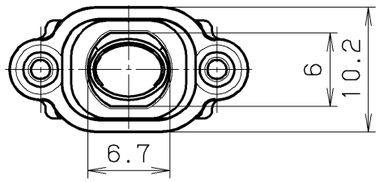

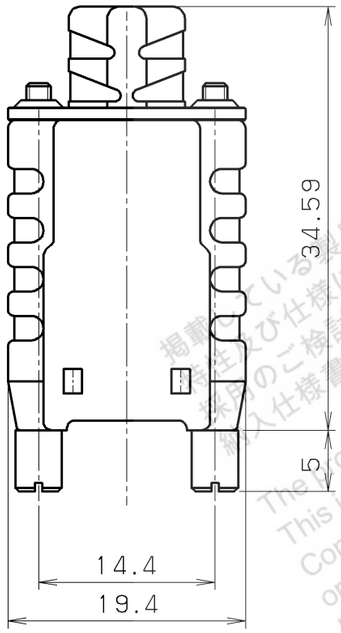

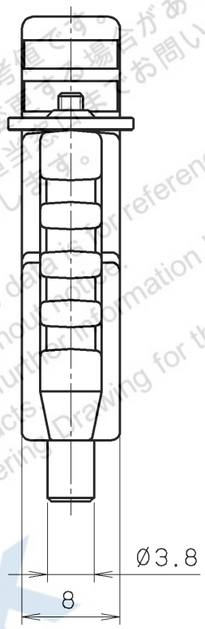

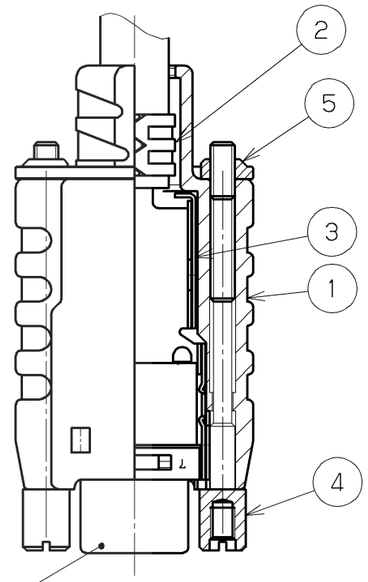

Connector
HDR-E14F( )G1+

After assembly drawing



				5	Plate (For lock screw)	Steel	1	Nickel plating	t=1.0 M2X0.4
				4	Lock screw	Stainless steel	2	———	———
⚠3				3	Inner shell B	Stainless steel	1	Nickel plating	———
⚠2				2	Inner shell A	Stainless steel	1	Nickel plating	———
⚠1				1	Plastic cover	ABS alloy	1	———	UL94V-0 Black
LTR.	DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE

DATE	SCALE	UNIT	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.	
Jan.15,2009	2/1	mm (INCH)			
APP. DATE&REV.				NAME	HDR-E type cable cover (RoHS)
DR.	DE.	CHK.	CHK.	APP.	PART NO. HDR-E14LPHC+ REV.
H.AIZAWA	H.AIZAWA	K.TAKAHASHI	———	K.KASAI	

ID= HDR-E14LPHC+ E0

掲載している製品の特性及び仕様は参考値です。
予告無く変更する場合があります。
採用のご検討やご注文の際は弊社担当までお問い合わせのうえ、
納入仕様書の取り交わしをお願いします。
The product information in this document is for reference only.
This is subject to change without notice.
Contact our sales staff for further information before considering or
ordering any of our products.
Please request Engineering Drawing for the most current and accurat
design information.
HTK