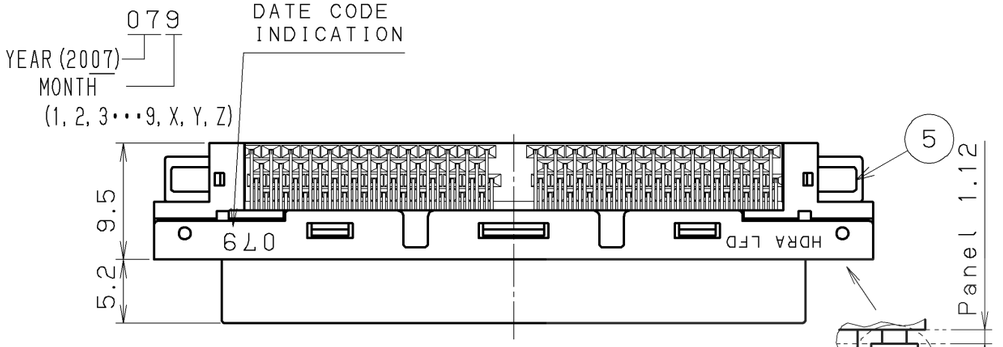

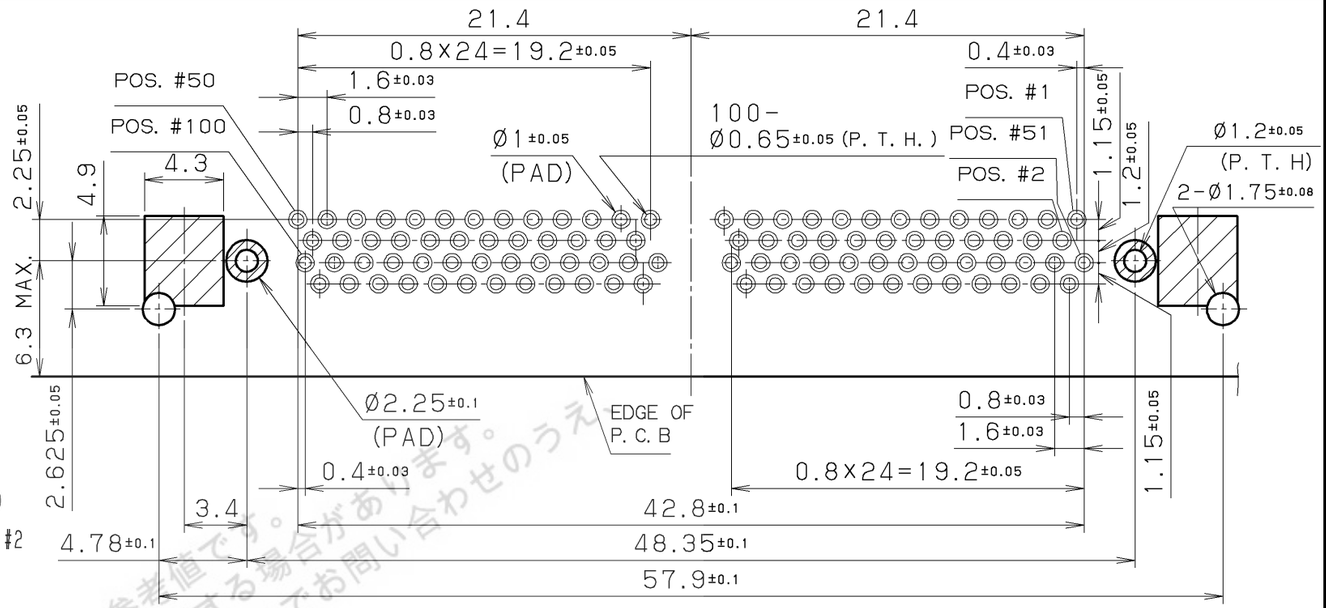

RECOMMENDED P. C. B. LAYOUT (t=1.6)
(MOUNT SIDE VIEW)

PAD

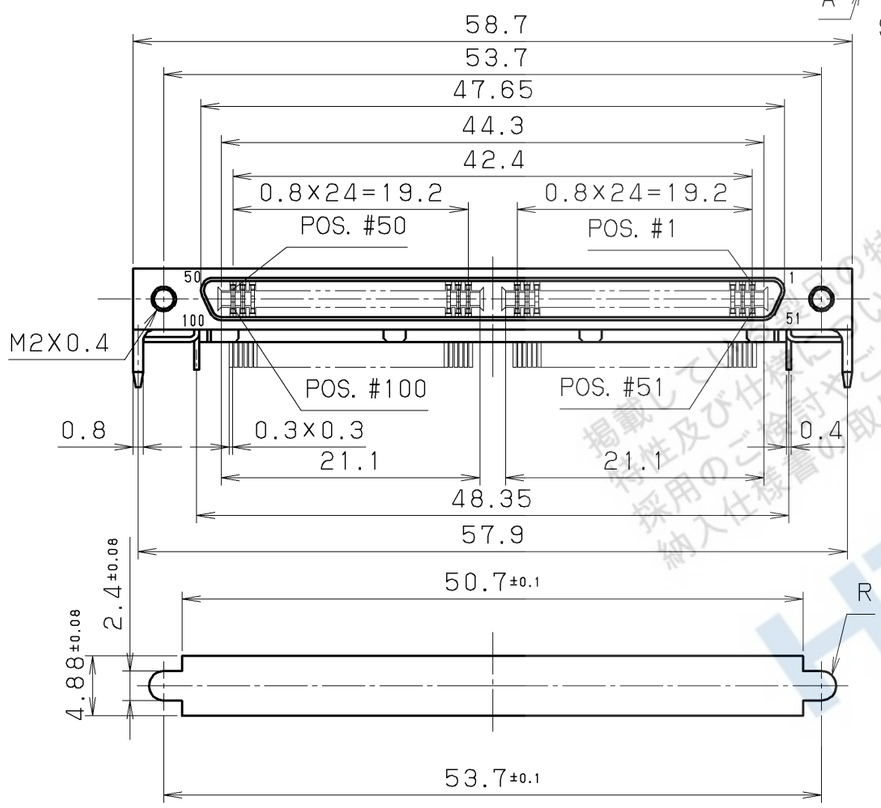

RECOMMENDED
PANEL CUT-OUT DIMENSIONS
(t=1.12±0.08)



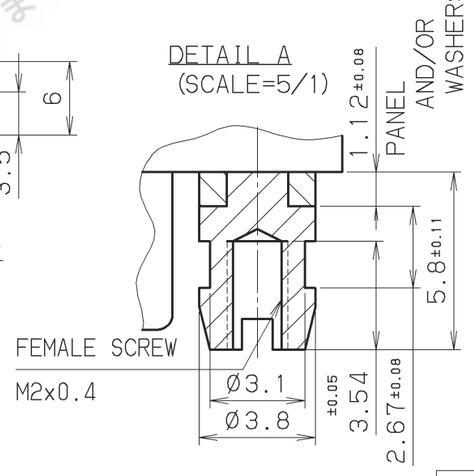

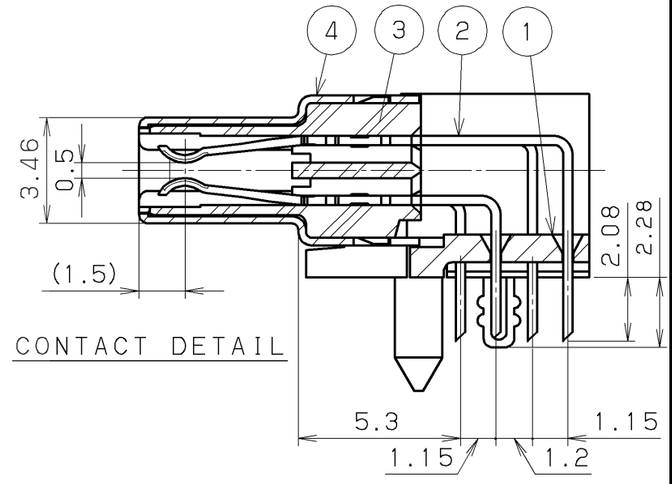

NOTE #1. CONTACT PLATING
CONTACT AREA: Pd/Ni 0.5μm+GOLD 0.1μm MIN.
TERMINAL AREA: GOLD 0.05μm
ALL OVER NICKEL PLATED.
#2. TWO LOCK SCREWS (ITEM#6) ARE
SUPPLIED WITH A CONNECTOR.

RoHS compliant

No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
6	LOCK SCREW	STEEL	2	NICKEL PLATING	M2x0.4
5	HOLD DOWN	PHOSPHOR BRONZE	2	NICKEL PLATING	———
4	SHELL	STEEL	1	NICKEL PLATING	———
3	INSULATOR	PA9T	1	———	UL94V-0 BLACK
2	CONTACT	PHOSPHOR BRONZE	100	SEE NOTE 1	———
1	BRACKET	PPS	1	———	UL94V-0 BLACK

LTR.	DATE	BY	REV. DESCRIPT
3			
2			
1			

DATE	SCALE	UNIT	
Sep.21, 2007	2 / 1	mm (INCH)	3RD. A. P
APP. DATE&REV.			

DR.	DE.	CHK.	CHK.	APP.
Y. KATO	Y. KATO	———	———	C. NUNOKAWA

HONDA TSUSHIN KOGYO CO., LTD.

NAME	0.8mm SPACING 100 POS. R/A FEMALE CONNECTOR	
PART NO.	HDRA-EC100LFDT-SL+	REV. A

ID= HDRA-EC100LFDT-SL+ EA

掲載している特性及び仕様は参考値です。
特性及び仕様については、予告無く変更する場合があります。
採用のご検討や、ご注文の際は弊社担当窓口までお問い合わせのうえ
納入仕様書の取り交わしをお願いします。
HTK