


CONTACT DETAIL (5/1)

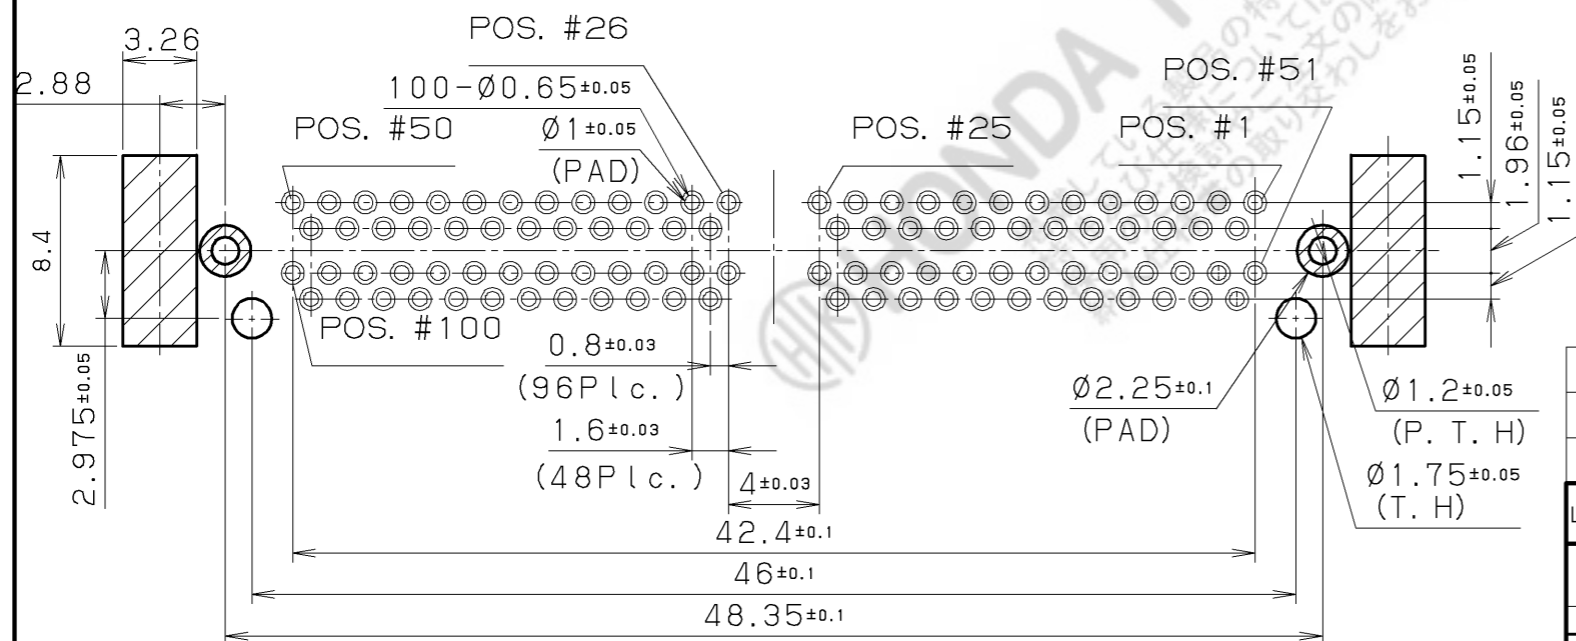

RECOMMENDED P. C. B. LAYOUT (MOUNT SIDE VIEW) PAD

NOTE 1. CONTACT PLATING
 CONTACT AREA: GOLD 0.76 μm MIN.
 TERMINAL AREA: GOLD 0.05 μm
 ALL OVER NICKEL UNDERPLATED.

6	LOCK SCREW	STEEL	2	NICKEL PLATING	M2
5	HOLD DOWN	PHOSPHOR BRONZE	2	NICKEL PLATING	
4	SQR. NUT	BRASS	2	NICKEL PLATING	M2x0.4
3	SHELL	STEEL	1	NICKEL PLATING	
2	CONTACT	PHOSPHOR BRONZE	100	SEE NOTE 1	
1	INSULATOR	PA9T	1		UL94V-0 BLACK

Δ										
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	Dec. 7. 2005		2 / 1							

DATE		SCALE		UNIT		3RD. A. P		HONDA TSUSHIN KOGYO CO., LTD.		
Dec. 7. 2005		2 / 1		mm (INCH)						
APP. DATE & REV.		CHK.		CHK.		APP.		NAME		
Y. KATO		Y. KATO		C. NUNOKAWA		H. EBIHARA		0.8mm SPACING 100POS. FEMALE CONNECTOR		
PART NO.		HDRA-EC100FDT-SLD+		REV.						