
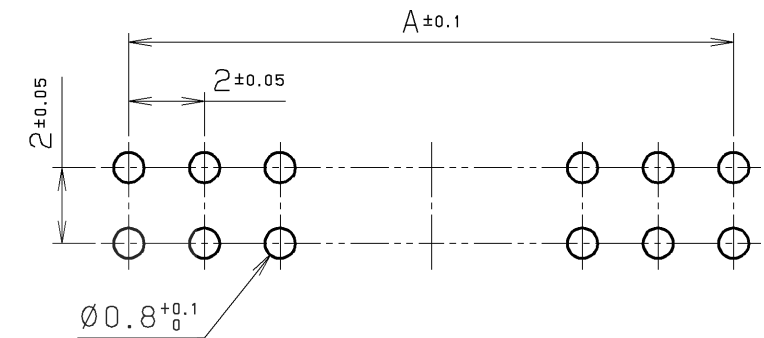
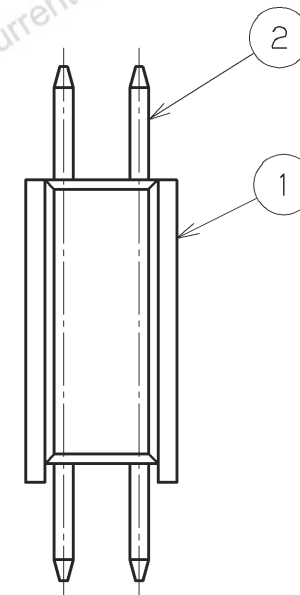
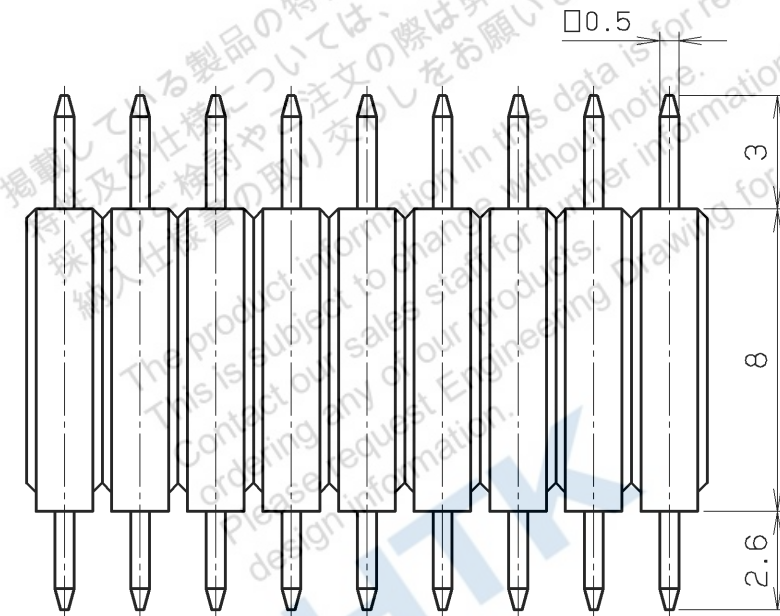


TABLE 1

n	A	B
2	—	(2)
4	2	4
6	4	6
8	6	8
10	8	10
12	10	12
14	12	14
16	14	16
18	16	18
20	18	20
22	20	22
24	22	24
26	24	26
28	26	28
30	28	30
32	30	32
34	32	34
36	34	36
38	36	38
40	38	40
42	40	42
44	42	44
46	44	46
48	46	48
50	48	50

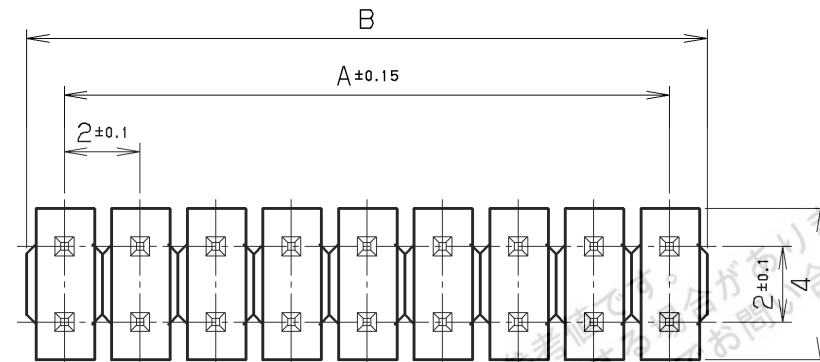

RECOMMENDED PCB LAYOUT
PCB THICKNESS $t=1.6$

TABLE 2

PART NO.	PLATING
LPC- (n) MH2	TIN/LEAD $2 \mu\text{m}$
LPC- (n) MH2G	GOLD $0.2 \mu\text{m}$

NOTE1. "n" SHOWS NUMBER OF CONTACTS.

2. AS FOR THE DIMENTION, SEE TABLE #1.

3. THE CONNECTOR CUTS AN INSULATOR AT THE "B" SIZE PART AND MAKES A CONNECTOR.

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE	
					2	CONTACT	PHOSPHOR BRONZE	n	SEE TABLE #2	—	
	APR.05.2005	T. ODA	1	REVISE	1	INSULATOR	PAG6	1	—	UL94V-0 BLACK	
DATE		SCALE		UNIT		3RD. A. P					
APR.13 (1998)		5/1		mm (INCH)		HTK HONDA TSUSHIN KOGYO CO., LTD.					
APP. DATE&REV.		DR.		DE.		CHK.		CHK.		APP.	
		T. ODA		T. ODA		—		C. NUNOKAWA		H. EBIHARA	
NAME		MALE CONNECTOR									
PART NO.		LPC- () MH2 ()								REV.	
										1 A	