


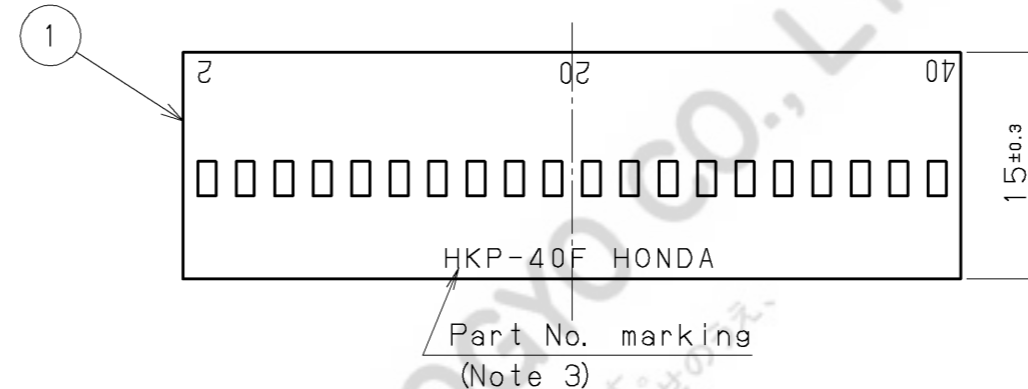


Table 1

n	Part number	A±0.2	B±0.3
4	HKP- 4F02	2.54	5.68
6	HKP- 6F02	5.08	8.22
8	HKP- 8F02	7.62	10.76
10	HKP-10F02	10.16	13.30
12	HKP-12F02	12.70	15.84
14	HKP-14F02	15.24	18.38
16	HKP-16F02	17.78	20.92
18	HKP-18F02	20.32	23.46
20	HKP-20F02	22.86	26.00
22	HKP-22F02	25.40	28.54
24	HKP-24F02	27.94	31.08
26	HKP-26F02	30.48	33.62
28	HKP-28F02	33.02	36.16
30	HKP-30F02	35.56	38.70
32	HKP-32F02	38.10	41.24
34	HKP-34F02	40.64	43.78
36	HKP-36F02	43.18	46.32
38	HKP-38F02	45.72	48.86
40	HKP-40F02	48.26	51.40
42	HKP-42F02	50.80	53.94
44	HKP-44F02	53.34	56.48
46	HKP-46F02	55.88	59.02
48	HKP-48F02	58.42	61.56
50	HKP-50F02	60.96	64.10
52	HKP-52F02	63.50	66.64
54	HKP-54F02	66.04	69.18
56	HKP-56F02	68.58	71.72
58	HKP-58F02	71.12	74.26
60	HKP-60F02	73.66	76.80
62	HKP-62F02	76.20	79.34
64	HKP-64F02	78.74	81.88
66	HKP-66F02	81.28	84.42
68	HKP-68F02	83.82	86.96
70	HKP-70F02	86.36	89.50

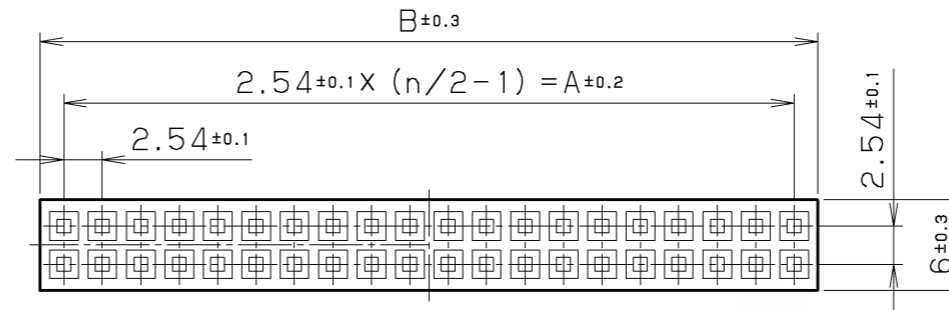

Note1. This figure shows HKP-40F02.
 Note2. "n" shows number of contacts.
 Note3. Marking
 Case of HKP-(4~ 6)F02 : No Marking
 Case of HKP-(8~14)F02 : HKP-(n) F
 Case OF HKP-(16~70)F02 : HKP-(n) F HONDA
 Note4. Applicable polarizing key
 HKP-44F201
 Note5. Mating connector
 HKP-(n)M2 etc.

Table 2

Applicable female contact		Applicable wire size		Plating	
Strip Form Terminal	Loose Piece Terminal	wire size	Outside diameter	Contact area	Other area
HKP-F103	HKP-F113	AWG#24~28	1.0~1.5mm	Gold plating	Gold plating
HKP-F403	HKP-F413			Gold plating	Nickel plating
HKP-F203A	HKP-F213A	AWG#28~32	0.5~0.8mm	Gold plating	Gold plating
HKP-F303A	HKP-F313A			Gold plating	Nickel plating

△										
△										
△				1	Insulator	PBT	1	—	UL94V-0 Black	
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE			SCALE		UNIT	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.		
	May.16 (2005)			2/1		mm (INCH)				
	APP. DATE&REV.									
	DR.	DE.	CHK.	CHK.	APP.	NAME	Insulator			
	M. MIYAZAKI	M. MIYAZAKI	—	C. NUNOKAWA	H. EBIHARA	PART NO.	HKP-() F02	REV.		